

LSE Series SLA Battery

LSE Series

The bosfa LSE range of VRLA batteries offers outstanding performance including a 15+ year design life and a cycle life in excess of 1200 cycles to 80% DOD. Built to the highest standards and compliant with the latest IEC 60896-21/22 standard this range also offers 100% capacity out-of-the-box and is capable of handling deep discharges for complete peace of mind. The use of flexible connectors and the ability to be installed both horizontally and vertically allows for multiple installation possibilities. This robust design uses the latest AGM technology to create a range that is suitable for many applications including both fixed and mobile telecoms, UPS, utilities and solar.



Application


- Cable Television
- Communication Equipment
- Security System
- UPS
- Control Equipment
- Medical Equipment
- Emergency Power System
- Power Plant

General Features




- Extra long life service design.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- Higher safety & reliable construction.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

Construction

- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerABS
- CoverABS
- SealantEpoxy Resin
- Safety valveEPDR
- TerminalCopper
- SeparatorFiber glass
- ElectrolyteSulfuric acid







Terminal Dimensions

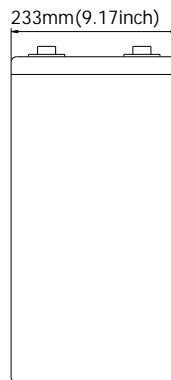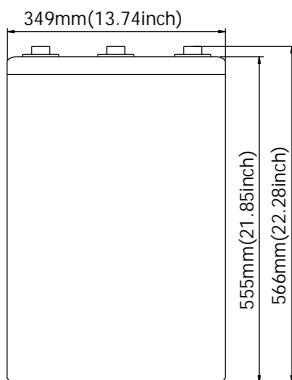

Battery Model	LSE2-2000			
Designed Floating Life	15 Years			
Capacity(25°C)	20HR(103.3A,1.75V)	10HR(200A,1.75V)	5HR(360A,1.75V)	1HR(1294A,1.75V)
	2066AH	2000AH	1800AH	1294AH
Dimensions	Length	Width	Height	Total Height
	233mm(9.17inch)	349mm(13.74inch)	555mm(21.85inch)	566mm(22.28inch)
Approx. Weight	121Kg (266.53 lbs)			
Internal Resistance	Full charged at 25°C :0.11 mΩ			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.3V-2.35V(-5mV/ °C), max. Current: 500A		2.25-2.27V(-3.3mV/ °C)	

LSE Series SLA Battery

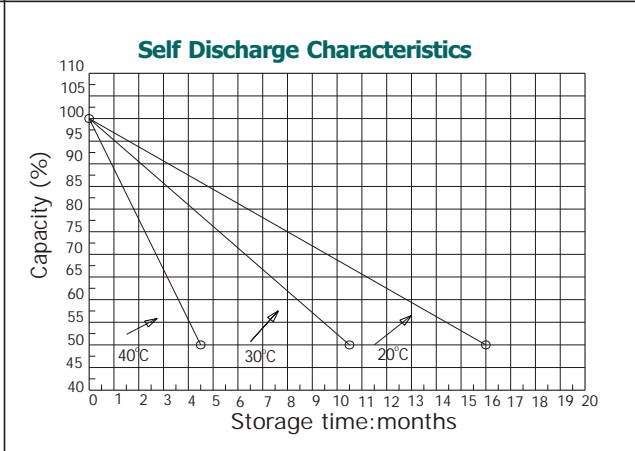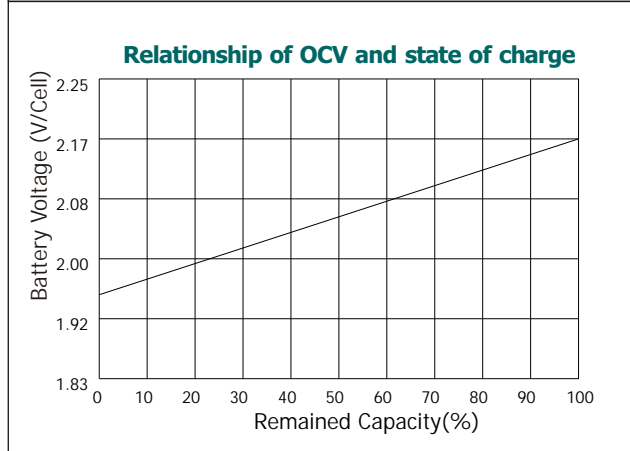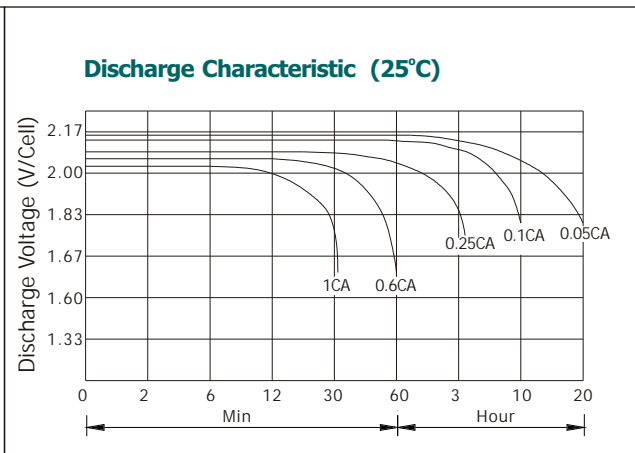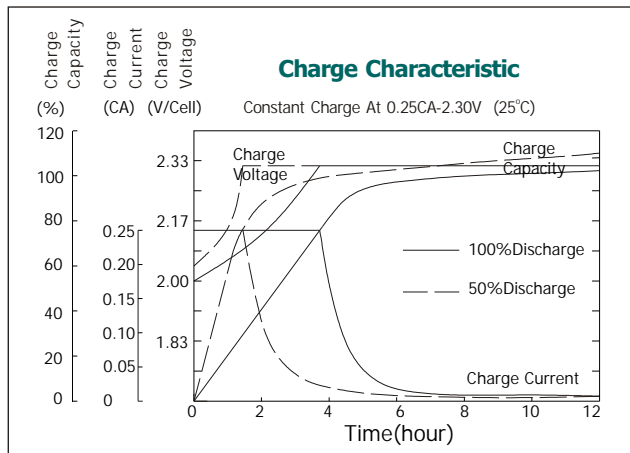

Constant current discharge ratings -amperes at 25°C

End Voltage \ Time	5min	15min	30min	60min	2hour	3hour	5hour	6hour	8hour	10hour	24hour
1.60V	2895.8	2436.6	1980.0	1304.8	801.9	588.7	384.9	331.7	259.6	215.0	99.7
1.65V	2715.4	2293.4	1805.8	1231.6	779.1	572.9	380.2	327.7	257.4	213.8	98.2
1.70V	2552.0	2170.3	1651.3	1170.2	752.4	547.1	370.7	319.8	253.7	210.5	97.8
1.75V	2407.4	2042.8	1522.6	1104.8	724.7	534.6	364.3	315.1	250.2	208.7	96.9
1.80V	2274.3	1905.1	1425.6	1049.4	702.9	522.7	356.0	308.9	245.5	205.9	94.9
1.83V	2106.4	1753.6	1330.6	990.0	673.2	506.9	350.5	304.9	244.0	204.9	94.9
1.85V	1952.6	1620.5	1253.3	926.6	633.6	479.5	333.6	292.1	235.6	197.5	92.2
1.88V	1792.8	1465.8	1160.3	841.5	589.1	452.1	318.0	278.2	227.0	190.1	89.4
1.90V	1599.2	1279.4	1041.5	766.3	529.7	428.3	302.1	265.0	213.6	180.0	86.0
1.94V	1439.5	1163.0	956.3	689.0	472.7	367.1	265.8	234.3	191.5	163.4	76.6

Constant power discharge ratings-watts at 25°C

End Voltage \ Time	5min	15min	30min	60min	2hour	3hour	5hour	6hour	8hour	10hour	24hour
1.60V	5666.1	4745.4	3778.5	2692.8	1737.5	1287.0	850.1	726.0	567.5	463.3	208.9
1.65V	5388.9	4554.0	3573.9	2488.2	1593.9	1207.8	820.4	702.9	546.5	452.2	204.9
1.70V	5181.0	4392.3	3484.8	2369.4	1547.7	1164.9	801.9	689.0	534.6	438.9	201.0
1.75V	5019.3	4227.3	3366.0	2277.0	1492.9	1122.0	782.1	673.2	514.8	432.3	199.0
1.80V	4880.7	4029.3	3247.2	2224.2	1465.2	1082.4	760.3	653.4	501.6	425.7	196.0
1.83V	4613.4	3844.5	3062.4	2145.0	1405.8	1056.0	744.5	633.6	491.7	417.5	193.1
1.85V	4438.5	3669.6	2887.5	2022.9	1346.4	1025.0	724.7	618.8	485.1	409.2	188.1
1.88V	4191.0	3399.0	2684.9	1900.8	1251.4	990.0	700.9	596.6	471.9	399.3	183.2
1.90V	3917.1	3184.5	2435.4	1742.4	1168.2	950.4	677.2	578.2	453.8	379.5	176.2
1.94V	3540.9	2851.2	2182.0	1544.4	1079.4	883.1	641.5	554.4	435.6	363.0	174.2